



12V LED Accent with Variable Lumen Output (VLO)

One light changes everything.

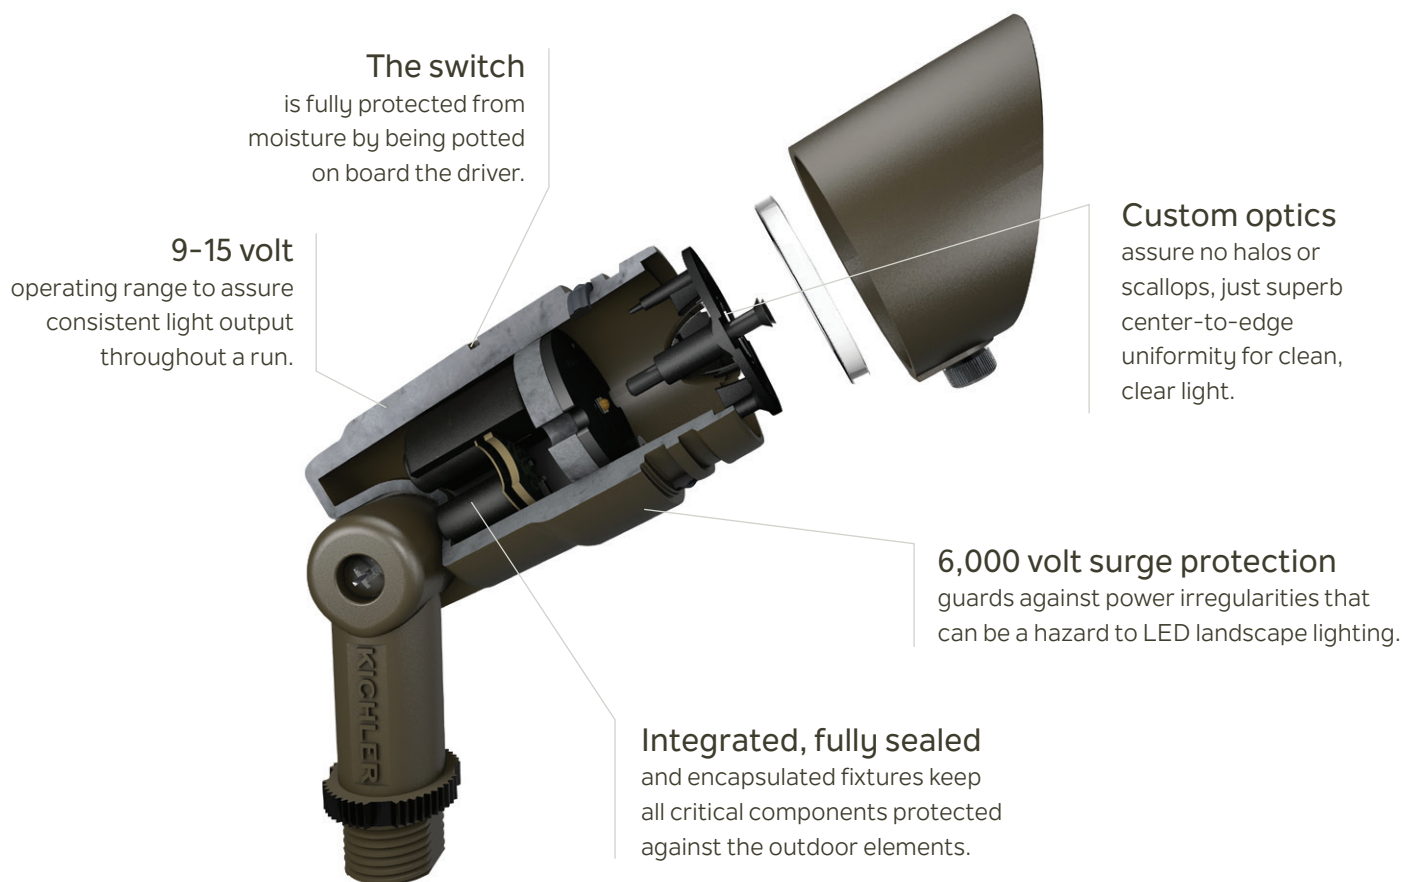
Get three lumen choices from one fixture...with easy and reliable adjustment.

KICHLER

Kichler is once again rewriting the rules for integrated LED flexibility and reliability

with the new 12V LED Accent Light with Variable Lumen Output (VLO). VLO technology allows you to easily switch between three lumen outputs without mechanically adjusting the settings on the fixture — eliminating the increased failure risk or long-term reliability concerns associated with a mechanical adjustment.

Our Finest Integrated LED Technology



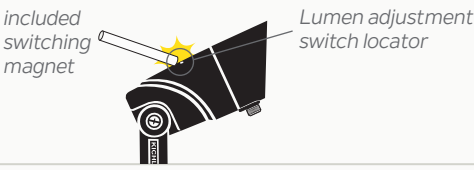


Backed by Kichler's industry-leading 15-year warranty.
For details, visit Kichler.com/Warranty

VLO makes it easier than ever to design, install and service landscape lighting.

- Create more customized landscape designs while carrying less fixtures in your inventory.
- Quickly adjust the lighting design during the initial installation for the right amount of light output — or years down the road as the landscape application needs changed.
- Two discrete sized fixture platforms give all the lumen options you need without the bulk.

Incredibly easy to adjust.

Each fixture is conveniently factory-set at the most popular lumen level for maximum contractor efficiency. To change, simply hold the included magnet over the lumen adjustment locator to begin programming mode. The fixture will flash continuously four times and go dark before blinking to indicate which lumen level is currently programmed. Programming begins from the factory setting and adjusts up in lumens (Level 1 for Large Accent, Level 2 for Small Accent).

VLO Adjustment Settings		Small Accent	Large Accent
Level 1	1: Flashes once <i>included switching magnet</i> 	100 lm	*400 lm
Level 2	2: Flashes twice 	*200 lm	600 lm
Level 3	3: Flashes three times 	300 lm	835 lm

**Factory setting*

Variable Lumen Output (VLO)

			12V LED Small Accent	
Level 1	Level 2	Level 3	Level 1	100 Lumens (shown: 16016 Small Accent, 35° Flood, 2W, 3000K)
			Level 2*	200 Lumens (shown: 16016 Small Accent, 35° Flood, 3.5W, 3000K) <i>*Factory setting</i>
			Level 3	300 Lumens (shown: 16016 Small Accent, 35° Flood, 5.5W, 3000K)
			12V LED Large Accent	
			Level 1*	400 Lumens (shown: 16019 Large Accent, 35° Flood, 5.25W, 3000K) <i>*Factory setting</i>
			Level 2	600 Lumens (shown: 16019 Large Accent, 35° Flood, 8.5W, 3000K)
			Level 3	835 Lumens (shown: 16019 Large Accent, 35° Flood, 12W, 3000K)

Note: Beam width/cut-off is dependent on how close the fixture is to the object.
Lumen levels are the same for 2700K and 3000K

Product Specifications & Ordering Guide

	12V LED Small Accent with VLO	12V LED Large Accent with VLO
Ordering Guide: Product Number Breakdown <i>Example: 16018 CBR 30</i>	1 Item Number for Fixture Size & Beam Angle: 16015 = Small 15° Spot 16016 = Small 35° Flood 16017 = Small 60° Wide Flood 16018 = Large 15° Spot 16019 = Large 35° Flood 16020 = Large 60° Wide Flood <u>1 6 0 1 8</u>	2 Product Finish: AZT = Textured Architectural Bronze BKT = Black CBR = Centennial Brass WHT = Textured White (only in 35°) <u>C B R</u>
	3 Color Temperature: 27 = 2700K, Warm White 30 = 3000K, Pure White <u>3 0</u>	
Wattage/VA, Delivered Lumens & Efficacy	Level 1 = 2W/3.5VA, 100 lm, 50 lm/W Level 2 = 3.5W/5.5VA, 200 lm, 57 lm/W Level 3 = 5.5W/7.5VA, 300 lm, 55 lm/W Factory set at Level 2(200 lm/20W Equivalent) <i>Lumen levels are the same for 2700K and 3000K</i>	Level 1 = 5.25W/8.5VA, 400 lm, 76 lm/W Level 2 = 8.5W/12.5VA, 600 lm, 70 lm/W Level 3 = 12W/17VA, 835 lm, 69 lm/W Factory set at Level 1(400 lm/35W Equivalent) <i>Lumen levels are the same for 2700K and 3000K</i>
Halogen Replacement	Level 1 = 10W Level 2 = 20W Level 3 = 30-35W	Level 1 = 35-40W Level 2 = 50W Level 3 = 75W
Light Source	1 integrated high output LED with 3-step binning for color consistency. Custom reflector optics. Tested to a Lumen Maintenance L70 of 50,000 hrs.	1 integrated high output chip-on-board LED with 3-step binning for color consistency. Custom T.I.R. (Total Internal Reflection) lens optics. Tested to a Lumen Maintenance L70 of 50,000 hrs.
Housing	Cast Aluminum (AZT, BKT, WHT) or Cast Brass (CBR)	
CRI	80+	
Voltage Range	9V-15V AC/DC with no loss in light output	
Integrated Surge Protection	6kv (6000 volt surge protection)	
Wiring	48" of usable #18-2, SPT-1W leads	
Notes	Includes 8" in-ground slotted stake, 2 gel-filled wire nuts and lumen switching magnetic key. Brass will naturally patina over time. White is only available in 35° Flood.	
Accessories	Cowls & Lens: Long Cowls, 360 Degree Cowls, Hexcell Louvers, Lenses - Red, Blue, Amber, Green Foliage, Holiday Green, Frosted and Linear Mounting: Surface Mounting Flange, 3" Round Mounting Base (CBR only), Surface Mounting Bracket, Junction Box Mounting Bracket, 90° Elbow, Stem Coupler, Stems, Two Fixture Mount (CBR only)	



Visit Kichler.com/VLOaccent