

24V SOLAR CHARGER FOR REVOLUTION, SCOUT & TITAN LIFTS

SPECIFICATIONS:

OPERATING VOLTAGE (MAX): 35VDC

OPERATING CURRENT (MAX): 225mA

HEIGHT: 36" [2032mm]

WIDTH: 14" [355.6mm]

DEPTH: 14" [355.6mm]

WEIGHT: 10lbs [4.5kg]

FRAME MATERIAL: TYPE 304 S.S.

SOLAR PANELS: TWO (2) 12V, 4W

THIN-FILM (CIGS).

CHARGE CONTROLLER:

PROTECTION RATING: IP68

[CONTROLLER: 1.5m 72 HOURS]

SHORT-CIRCUIT PROTECTION

REVERSE POLARITY DETECTION

OVERCHARGE DETECTION

(PREVENTS BATTERY DAMAGE)

24V SOLAR
PANEL ARRAY

CHARGE
CONTROLLER
(UNDERNEATH)


STAINLESS
STEEL
FRAME

MOUNTING
PLATE

POWER
PLUG

CHARGER CABLE

FUSE BOX

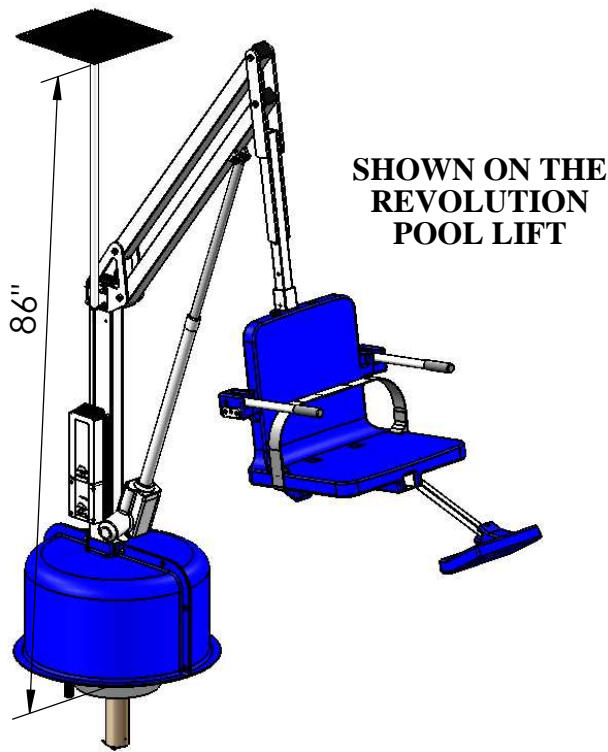

9889 GARRY MORE LANE
MISSOULA, MT 59808
(406) 549-0769
FAX (406) 549-2602

Aqua Creek Products

The Total Solution for Pool and Spa Access

NOTE:

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
*ALL DIMENSIONS ARE IN INCHES

PRODUCT:	F-045SCH	
DWG #:	F-045SCH-1	
SCALE:	1:8	DATE: 1/20/16
DRAWN BY:	KR	REVISION: C