



## Introducing CCH® Clarifier Pro!

SKU 30497

Buy a Full Pallet of any  
CCH® Pro Line PMP and  
get **3 FREE** CCH® Feeder  
Dosing Pumps

CCH® Clarifier Pro is a NSF 50 certified pool maintenance product! With a more concentrated formula, available in 5 gallon containers and dosed with an automated pump, the CCH® Clarifier Pro makes commercial pool care and maintenance easier!




A simple, low cost method to provide bathers with an added layer of protection against one of the most dangerous pathogens found in recreational water, Cryptosporidium!

Adding CCH® Clarifier Pro to your filtration system not only gives your facility crypto protection, it also acts as a clarifier. By increasing the filter's capacity to capture crypto, it also catches other dirt and debris that could make the pool cloudy.

- Improves water clarity
- Improves efficacy of UV systems
- Reduces turbidity by an average of 37.5%

The Model Aquatic Health Code (MAHC) is moving towards requiring all pool chemicals to be NSF certified. CCH® strives to meet evolving community, state, and national water standards with innovative solutions!

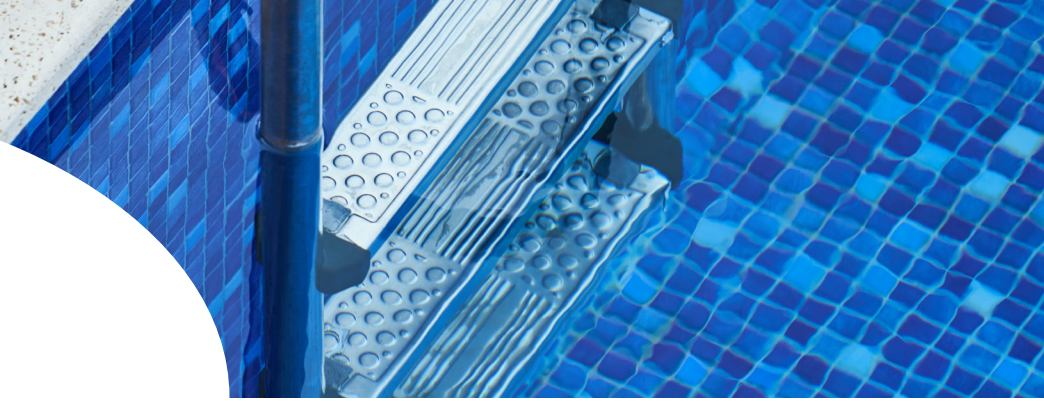

In an effort to ensure ease of use, the CCH® Clarifier Pro can be dosed multiple ways!



### Best Option

SKU 74457

#### Using the CCH® Feeder Dosing Pump!

Featuring a 10g rotomolded tank with integrated Stenner pump – just add two 5-gallon containers of product and set to auto dosing specific to chemistry and pool size.

Buy a Full Pallet of any CCH® Pro Line PMP and get **3 FREE** CCH® Feeder Dosing Pumps



### Better Option

SKU 74445

#### Using the Stenner pump only!

Pump can be wall mounted with tubing connected to product container and set to auto dosing to specific chemistry and pool size.



### Good Option

#### Using a hand pump!

Hand pump can be inserted into the top of the product container and dosed to specific chemistry and pool size.

CCH® Clarifier Pro Dosing Chart

Gallons of Pool Water	Pump Setting	Hand Pump Dosing (oz)
25,000	2.5	5
50,000	5	10
100,000	10	20
150,000	15	30
200,000	20	40
250,000	25	50
300,000	30	60
500,000	50	100
750,000	75	150
1,000,000	100	200

Pump Operating Parameters

Default Output*	Up to 0.45 gal/day	Up to 1.7L/day
Max Pressure	80 psi	5.5 bar
Max Temperature	104 °F	40 °C
Motor Voltage (Amp Draw)	120V 60Hz	

\*Output of up to 9.5 gallons (36L) per day is available with larger peristaltic tubing

For more information visit [www.cchpoolcare.com](http://www.cchpoolcare.com) or call us at 1-800-478-5727