

# ROTRON® Regenerative Blowers

## DR 404 / 454 / 505 / 513 / 656

### Regenerative Spa Blower Designed for Commercial Spa Agitation

#### FEATURES

- Manufactured in the USA – ISO 9001 compliant
- CE compliant – Declaration of Conformity on file
- Maximum flow: 105, 127, 160, 200 or 78 SCFM
- Maximum pressure: 56, 58, 74, 69 or 88 IWG
- Standard motor: 1.0, 1.5, 2.0, 3.0 HP, Spa Duty ODP
- Cast aluminum blower housing, impeller & cover; cast iron flanges (threaded)
- UL & CSA approved motor with permanently sealed ball bearings and Class B rated thermal protection
- Inlet & outlet internal muffling
- Quiet operation within OSHA standards

#### MOTOR OPTIONS


- International voltage & frequency (Hz)
- Chemical duty, high efficiency, inverter duty or industry-specific designs
- Various horsepower for application-specific needs

#### BLOWER OPTIONS


- Corrosion resistant surface treatments & sealing options
- Remote drive (motorless) models
- Slip-on or face flanges for application-specific needs

#### ACCESSORIES (See Catalog Accessory Section)

- Flowmeters reading in SCFM
- Filters & moisture separators
- Pressure gauges, vacuum gauges & relief valves
- Switches – air flow, pressure, vacuum or temperature
- External mufflers for additional silencing
- Variable frequency drive package

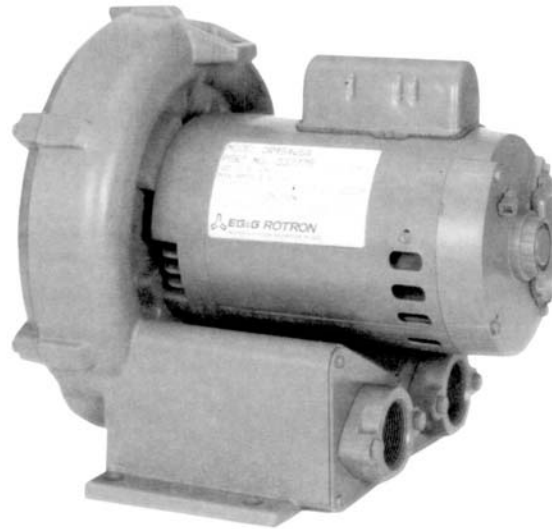

#### BLOWER PERFORMANCE AT STANDARD CONDITIONS

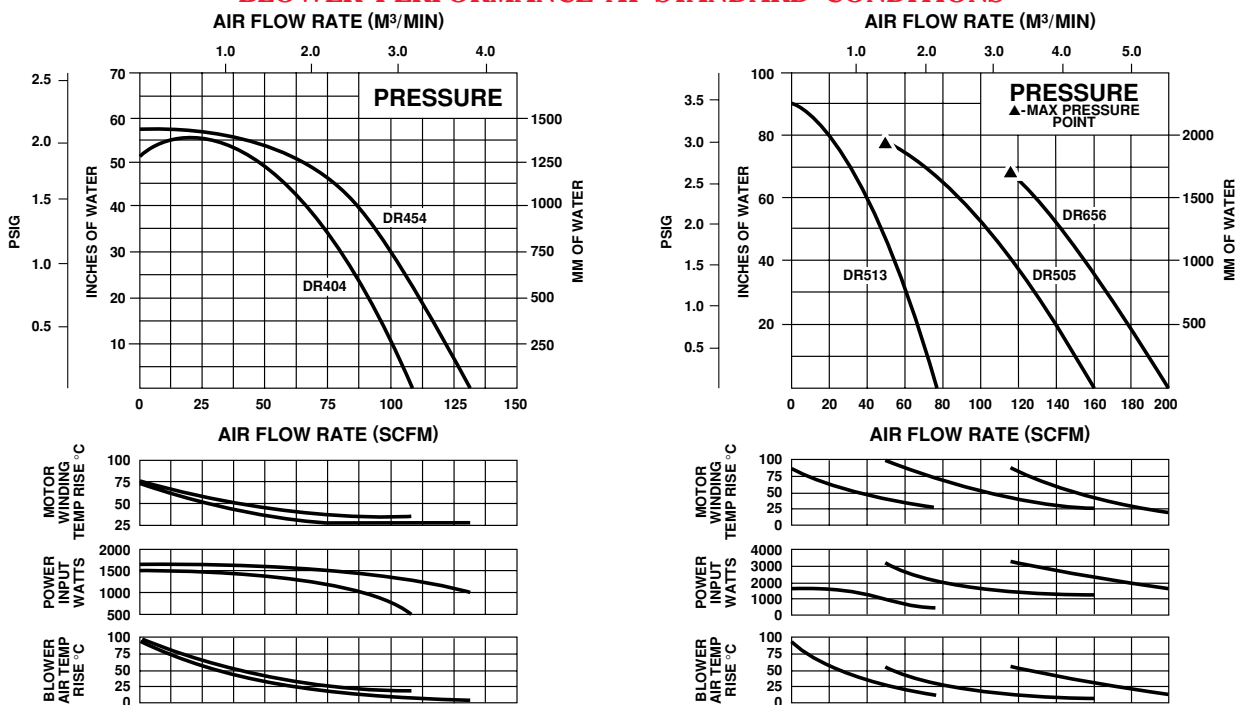

Rev. 2/04