

Type:

Model:

**MIRAGE Integrated LED
Uplight Fixture**

SPECIFICATIONS

VOLTAGE:
12V AC/DC.

HOUSING:
Cast aluminum with removable 3" shroud.
Optional 6" shroud available.

FINISH:
Architectural bronze. Custom powder coated
colors available.

LENS:
Tempered glass.


MOUNTING:
Threaded with 1/2" NPT. Heavy-duty
composite stake included. May be mounted
into threaded hubs in junction boxes or
mounting accessories

WIRING:
Pre-wired with a five-foot
pigtail of 18/2 cable.

WARRANTY:
Ten years.




Shown with optional 6" shroud

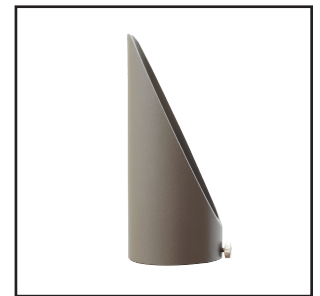


Optional 6" shroud 489849

The Mirage uplight features an integrated LED source available in 3, 6 or 10 watts. 2700K, 3000K or 5000K options. 25, 40 and 60-degree beam spreads.

DIMENSIONS:

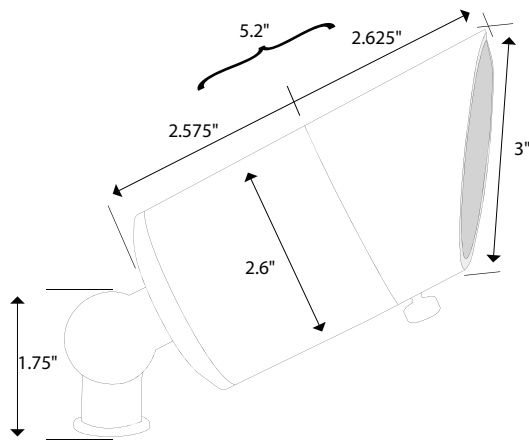

With Standard 3" Shroud

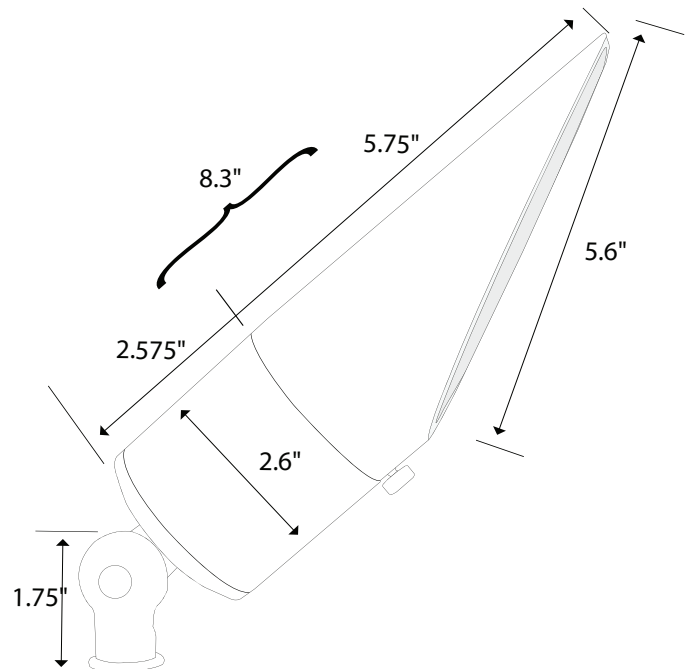

With Optional 6" Shroud

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spreads from 25° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K, 3000K or 5000K.

FIXTURE ORDERING INFORMATION

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489801-MS



MODEL	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	MOUNTING
489801 MIRAGE 6W 25° 2700K	6W	7.47 VA	25°	2700K	516 lm	86 lm/W	80	MS Heavy-duty Slotted Mounting Stake (incl.) - 490034
489802 MIRAGE 6W 40° 2700K	6W	7.47 VA	40°	2700K	516 lm	86 lm/W	80	SH Extended 6" Shroud - 489849
489803 MIRAGE 6W 60° 2700K	6W	7.47 VA	60°	2700K	516 lm	86 lm/W	80	ATM Aluminum Tapered Surface Mount - 490187
489806 MIRAGE 6W 25° 3000K	6W	7.38 VA	25°	3000K	546 lm	91 lm/W	80	AGM Aluminum Gutter Mount - 490188
489807 MIRAGE 6W 40° 3000K	6W	7.38 VA	40°	3000K	546 lm	91 lm/W	80	
489808 MIRAGE 6W 60° 3000K	6W	7.38 VA	60°	3000K	546 lm	91 lm/W	80	
489811 MIRAGE 10W 25° 2700K	10W	11.70 VA	25°	2700K	780 lm	78 lm/W	80	R6 Aluminum 6-In Riser - 490181
489812 MIRAGE 10W 40° 2700K	10W	11.70 VA	40°	2700K	780 lm	78 lm/W	80	R12 Aluminum 12-In Gutter Mount - 490182
489813 MIRAGE 10W 60° 2700K	10W	11.70 VA	60°	2700K	780 lm	78 lm/W	80	R24 Aluminum 24-In Gutter Mount - 490183
489816 MIRAGE 10W 25° 3000K	10W	11.51 VA	25°	3000K	800 lm	80 lm/W	80	
489817 MIRAGE 10W 40° 3000K	10W	11.51 VA	40°	3000K	800 lm	80 lm/W	80	
489818 MIRAGE 10W 60° 3000K	10W	11.51 VA	60°	3000K	800 lm	80 lm/W	80	
489840 MIRAGE 10W 60° 5000K Uplight	10W	11.51 VA	60°	5000K	900 lm	90 lm/W	80	

LED LAMP SPECIFICATIONS

LAMP TYPE:
Integrated LED.

OPTICS:
Integral optics providing available beam spreads from 25° to 60°.

COLOR TEMPERATURES:
Color temperature options provide the following qualities: 2700K, 3000K or 5000K.

FIXTURE ORDERING INFORMATION

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489801-MS



MODEL	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	MOUNTING
489851 MIRAGE 3W 25° 2700K Uplight	3W	4.58 VA	25°	2700K	294 lm	98 lm/W	80	MS Heavy-duty Slotted Mounting Stake (incl.) - 490034 SH Extended 6" Shroud - 489849 ATM Aluminum Tapered Surface Mount - 490187 AGM Aluminum Gutter Mount - 490188 R6 Aluminum 6-In Riser - 490181 R12 Aluminum 12-In Gutter Mount - 490182 R24 Aluminum 24-In Gutter Mount - 490183
489852 MIRAGE 3W 40° 2700K Uplight	3W	4.58 VA	40°	2700K	294 lm	98 lm/W	80	
489853 MIRAGE 3W 60° 2700K Uplight	3W	4.58 VA	60°	2700K	294 lm	98 lm/W	80	
489856 MIRAGE 3W 25° 3000K Uplight	3W	4.59 VA	25°	3000K	315 lm	105 lm/W	80	
489857 MIRAGE 3W 40° 3000K Uplight	3W	4.59 VA	40°	3000K	315 lm	105 lm/W	80	
489858 MIRAGE 3W 60° 3000K Uplight	3W	4.59 VA	60°	3000K	315 lm	105 lm/W	80	