

Type:

Model:

Encapsulated Bi-Pin LED Lamps

SPECIFICATIONS

BASE: G4 or GY6.35 bi-pin base.


VOLTAGE: 12V AC/DC.

CRI: 80+

WEATHERPROOF: IP65 (weatherproof)

WARRANTY: Five years.


Encapsulated bi-pin lamps from Dauer offer very durable 360° illumination for deck lights, path lights, step lights, wall washers, and more. Warm and cool white color temperatures and wildlife-safe amber are available. IP65 weatherproof rated. Warrantied for 5 years, average rated life is 25,000 hours.

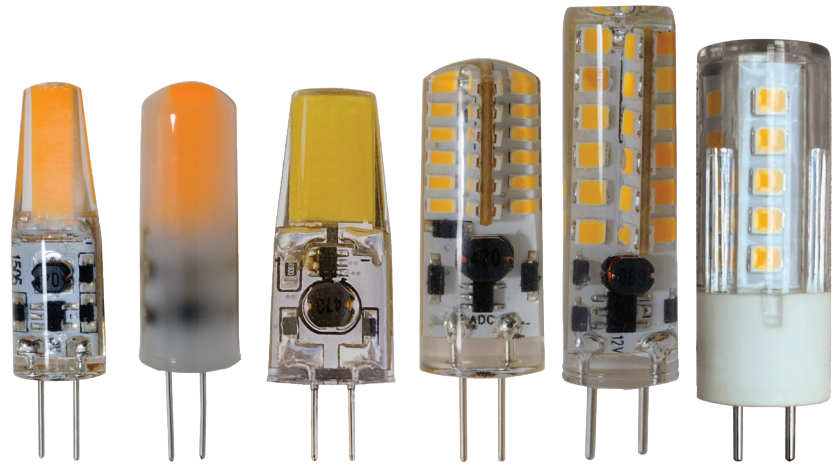

2W 487170 2700K and 3000K	2W 487172 (frosted) 2700K and 3000K	3W 487173/ 487174/ 487175 2700K and 3000K	3W 487192/ 487194 2700K and 3000K	4W 487196/ 487198 2700K and 3000K	4W 487199 2700K and 3000K
------------------------------------	---	--	---	---	------------------------------------



DIMENSIONS:

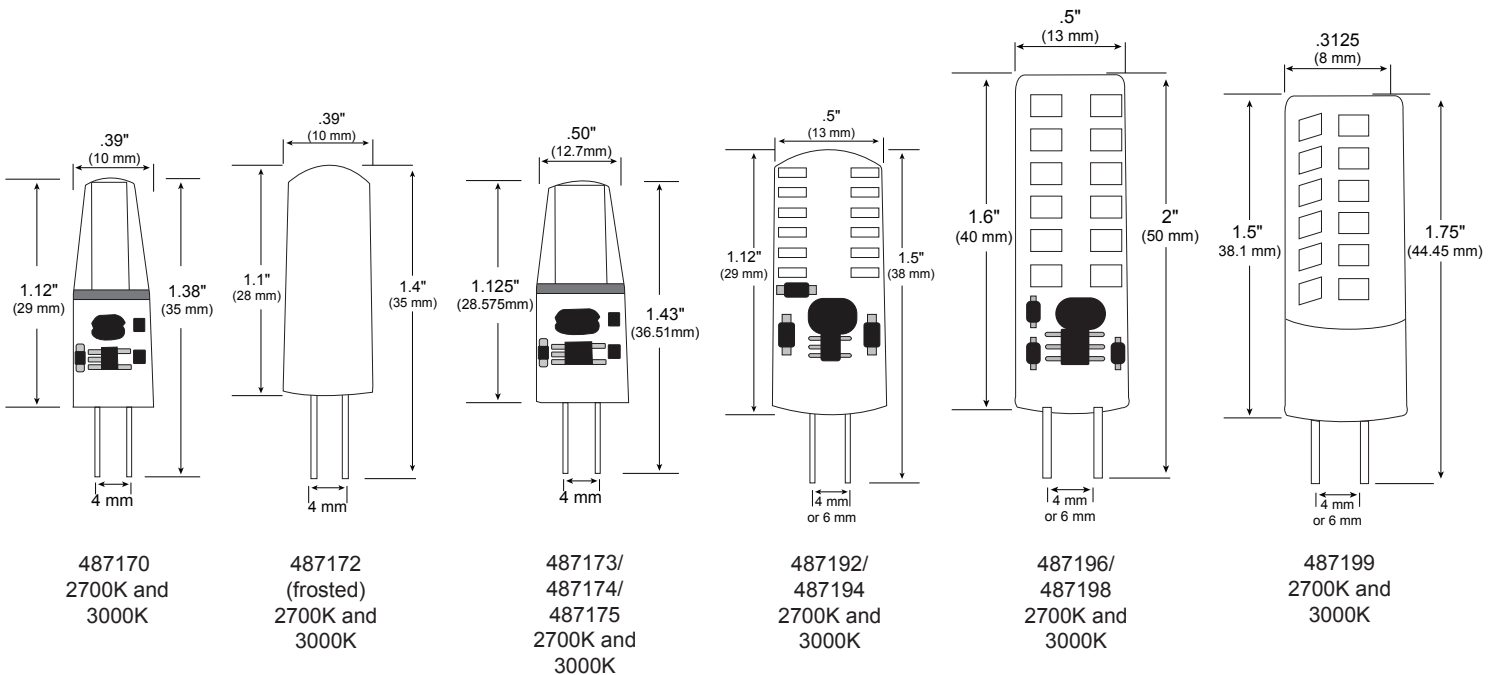

LED LAMP ORDERING CODES

CODE	DESCRIPTION	WATTAGE	COLOR TEMP.	NO. OF DIODES	LUMENS	EFFICACY	BASE
487170-2700K	LED-ENC-G4-2COB-12V-2700K-C	2W	2700K	2	210	105 lm/W	G4
487170-3000K	LED-ENC-G4-2COB-12V-3000K-C	2W	3000K	2	210	105 lm/W	G4
487172-2700K	LED-ENC-G4-2COB-12V-2700K-F	2W	2700K	2	210	105 lm/W	G4
487172-3000K	LED-ENC-G4-2COB-12V-3000K-F	2W	3000K	2	210	105 lm/W	G4
487173-2700K	LED-ENC-GY6.35-2COB-12V-2W-2700K-C	2W	2700K	-	210	105 lm/W	GY.6.35
487173-3000K	LED-ENC-GY6.35-2COB-12V-2W-3000K-C	2W	3000K	-	210	105 lm/W	GY.6.35
487174-2700K	LED-ENC-G4-3COB-12V-3W-2700K-C	3W	2700K	-	300	100 lm/W	G4
487174-3000K	LED-ENC-G4-3COB-12V-3W-3000K-C	3W	3000K	-	320	106 lm/W	G4
487175-2700K	LED-ENC-GY6.35-3COB-12V-3W-2700K-C	3W	2700K	-	300	100 lm/W	GY.6.35
487175-3000K	LED-ENC-GY6.35-3COB-12V-3W-3000K-C	3W	3000K	-	320	106 lm/W	GY.6.35
487192-2700K	LED-ENC-G4-2835SMD-12V-3W-2700K	3W	2700K	48	230	77 lm/W	G4
487192-3000K	LED-ENC-G4-2835SMD-12V-3W-3000K	3W	3000K	48	230	77 lm/W	G4
487194-2700K	LED-ENC-GY6.35-2835SMD-12V-3W-2700K	3W	2700K	48	230	77 lm/W	GY.6.35
487194-3000K	LED-ENC-GY6.35-2835SMD-12V-3W-3000K	3W	3000K	48	230	77 lm/W	GY.6.35
487196-2700K	LED-ENC-G4-2835SMD-12V-4W-2700K	4W	2700K	48	280	70 lm/W	G4
487196-3000K	LED-ENC-G4-2835SMD-12V-4W-3000K	4W	3000K	48	280	70 lm/W	G4
487198-2700K	LED-ENC-GY6.35-2835SMD-12V-4W-2700K	4W	2700K	48	280	70 lm/W	GY.6.35
487198-3000K	LED-ENC-GY6.35-2835SMD-12V-4W-3000K	4W	3000K	48	280	70 lm/W	GY.6.35
487199-2700K	LED-ENC-GY6.35-SMD2835-12V-4W-2700K-HO	4W	2700K	39	440	110 lm/W	GY.6.35
487199-3000K	LED-ENC-GY6.35-SMD2835-12V-4W-3000K-HO	4W	3000K	39	440	110 lm/W	GY.6.35