




---

PROJECT

---

CATALOG #

---

TYPE

---

NOTES


---

## TE Well Light STANDARD PREMIUM

The TE incorporates top-quality, marine-grade materials to ensure high performance in even the most extreme environments.

### Quick Facts

- Die-cast brass or aluminum construction
  - MR-16 lamp type
  - ProAim® adjustability
- Compatible with Luxor® technology
  - Input voltage: 10-15V

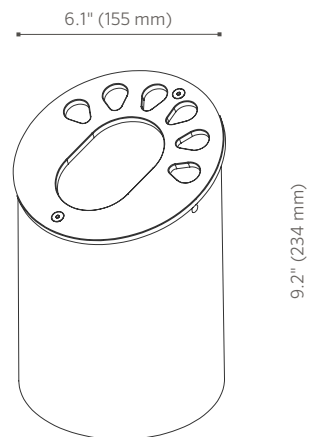

# TE Well Light SPECIFICATIONS

## FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be used to create elegant landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

## Materials

Die-cast C360 brass or aluminum faceplate and aluminum A380 sealed housing with stainless steel hardware. ABS construction sleeve.

## Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

## Lamp

GU5.3 lamp base. Preinstalled LED MR-16 with Cree® LEDs offers a warm 2,700K color temperature with a minimum rated life (L90) 40,000 hours.

## Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3' (1 m) length

## Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

## Housing

Die-cast A380 aluminum housing with capacity for MR-16 lamps.

## Construction Sleeve

Bronze-colored ABS composite construction sleeve with flat (0°) or angled (20°) installation options.

## Faceplate

Die-cast C360 brass flat faceplate with window and hemicycle eye drop pattern.

## Lens

Clear polycarbonate lens with shock resistance and high tolerance for thermal expansion and stress. Load strength suitable for walk-over and drive-over applications. Static load rating: 4,400 lbs (2,000 kg).

## Finish

Two-layer protection of sulfuric acid anodization and polyester TGIX powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

## Hardware

Stainless steel hardware

## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Weight

2.4 lbs (1.1 kg)

## Control

ZD option utilizes Luxor technology to zone light fixtures in up to 250 groups, and dim each group in 1% increments between 0 and 100%.

## Manufacturing

9001:2015 ISO certified facility

## Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

## Installation Requirements

Designed for recessed installation in the upward direction only.

## International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 by selecting the “e” version in parts builder.

## Warranty

10-year limited warranty on luminaire; 5-year limited warranty on preinstalled FX lamps

## Listings



# TE Well Light ORDERING INFORMATION

Fixture	Lamp	Compliance	Finish
<b>TE*</b>	■ <b>NL</b> No Lamp	■ <b>UL</b> UL Listed	■ <b>BS</b> Natural Brass
	■ <b>LED20WFL</b> 20W Eq.; 4W, 4.3VA, 2700K, 35°	■ <b>e</b> CE Certified	■ <b>NP</b> Nickel Plate
	■ <b>LED35WFL</b> 35W Eq.; 5W, 5.4VA, 2700K, 35°		■ <b>BZ</b> Bronze Metallic
	■ <b>LED30WFL</b> 50W Eq.; 6W, 6.5VA, 2700K, 35°		■ <b>DG</b> Desert Granite
	■ <b>ZD35WFL</b> 35W Eq.; 5W, 5.4VA, 2700K, 35°, Zone/Dim		■ <b>WI</b> Weathered Iron
			■ <b>SV</b> Silver
			■ <b>SB</b> Sedona Brown
			■ <b>FB</b> Black
			■ <b>WG</b> White Gloss
			■ <b>FW</b> Flat White
			■ <b>AL</b> Almond



EXAMPLE FIXTURE CONFIGURATION:  
TE-LED20WFL-NP



\*Includes Construction Sleeve (250014350000)

## LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code
■ <b>LOW-VOLTAGE CUBE</b> Supports AC dimmable LEDs and incandescent; MAX LOAD: 60W/5A	LCM-LV
■ <b>RELAY/0-10V CUBE</b> Supports relay switch; MAX LOAD: 250VAC/5A	LCM-RLY-010V



## ACCSSORY: Specify Separately

Item	Code
■ <b>CLEAR PROTECTIVE INSERT</b>	KG-CPI



Cree is a registered trademark of Cree Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2019 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.