



SUPER II™ PUMP

MAX-RATED, HIGH-PERFORMANCE
PUMP SERIES

PUMPS



Performance of a lifetime.

Power your system with the max-rated, high-performance Super II pump series from Hayward®. These efficient, large-capacity pumps are built to last and engineered to perform even under the most demanding conditions.

Convenient features include a see-through cover so pool owners know exactly when to empty the extra-large debris basket. Performance features include full-flow hydraulics that allow greater flow at a lower cost of operation and a housing design that makes it as quiet as it is dependable.


Super II Pumps. The superior choice.

All Components Molded of Corrosion-Proof Reinforced Thermoplastic for extra durability and long life.

See-Through Strainer Cover lets you see when basket needs cleaning and eliminates guesswork. Test feature allows line pressure test to 40 psi (2.75 bar).

Rugged, One-Piece Housing with full-flow ports, ensures rapid priming and continuous operation.

Corrosion-Proof Impeller provides high-volume output to accommodate even the most demanding installations, including pool/spa combinations and in-floor cleaning systems.

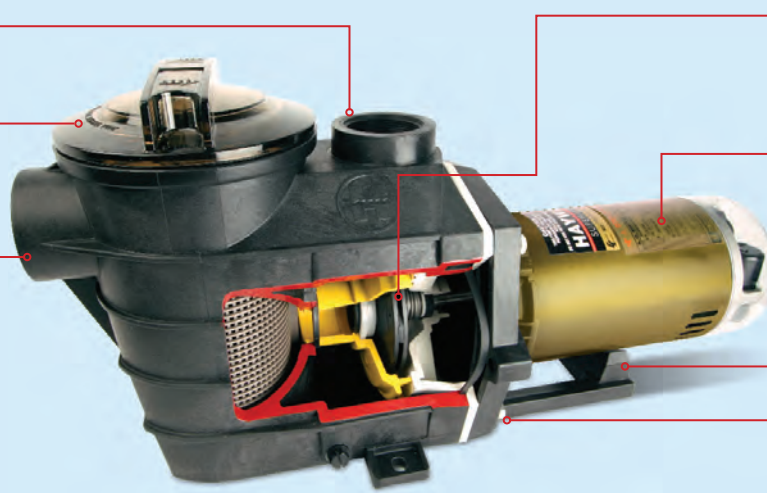

Heat-Resistant, Industrial-Size Ceramic Seal is long-wearing. For fresh or saltwater use.


Heavy-Duty, High-Performance Motor with airflow ventilation for quieter, cooler operation.

Uni-Bracket Mounting Base provides stable, stress-free support, plus versatility for any installation requirement. Adapts 48- and 56-frame motors.

Service-Ease Design allows simple access to all internal parts. Motor and entire drive group assembly can be removed, without disturbing pipe or mounting connections, by disengaging just six bolts.

| OVERALL DIMENSIONS | MODEL | Motor Power | | | Pipe Size | Dimension "A" | |
|------------------------------------|-------------------------|-------------|----------|----------------|-----------|---------------|-----|
| | | Total HP | Rated HP | Service Factor | inches | inches | mm |
| | Max Rated 220V/50Hz 1PH | | | | | | |
| | SP3007X1051 | 1.10 | 1 | 1.10 | 1 ½ | 14 ½ | 368 |
| | SP3010X1551 | 1.50 | 1 ½ | 1.00 | 2 | 15 ⅝ | 397 |
| | SP3015X2051 | 2.00 | 2 | 1.00 | 2 | 16 ⅝ | 422 |
| | SP3025X30G51 | 3.00 | 3 | 1.00 | 2 | 17 ¾ | 451 |
| Max Rated 220-240/380-415/50Hz 3PH | | | | | | | |
| | SP303053 | 3.00 | 3 | 1.00 | 2 | 17 ½ | 445 |

SUPER II PUMP FLOW VS. TOTAL HEAD

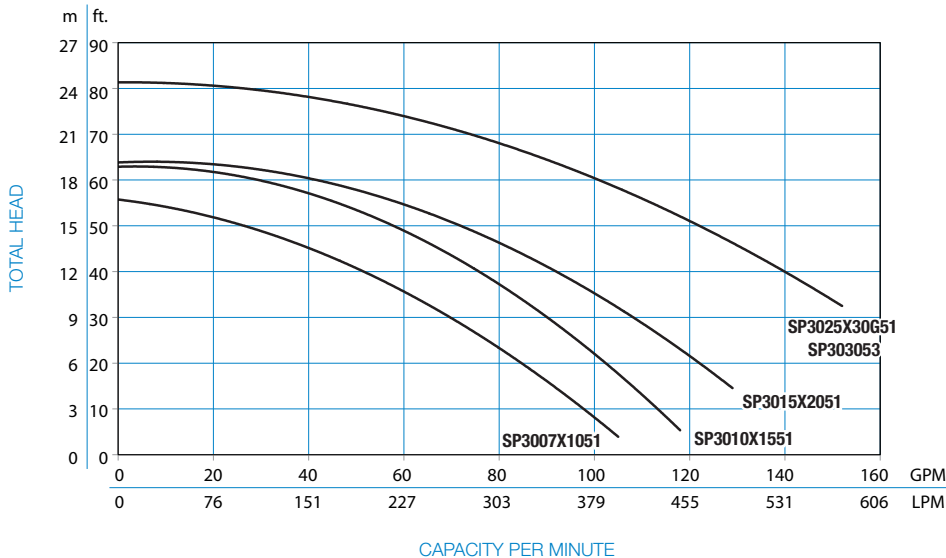

Super II 155-Cubic-Inch (2500cc) Basket

is more like a bucket. The Super II Pump Series features impressive leaf-holding capacity. Rigid construction includes load-extender ribbing for free-flowing operation, even under extra-heavy debris loads.

Super II Pump Series pumps are listed by:



To take a closer look at Hayward Pumps, go to www.haywardpool.com



International Marketing Group
2875 Pomona Blvd | Pomona, CA 91768 USA