


# X-Riser®

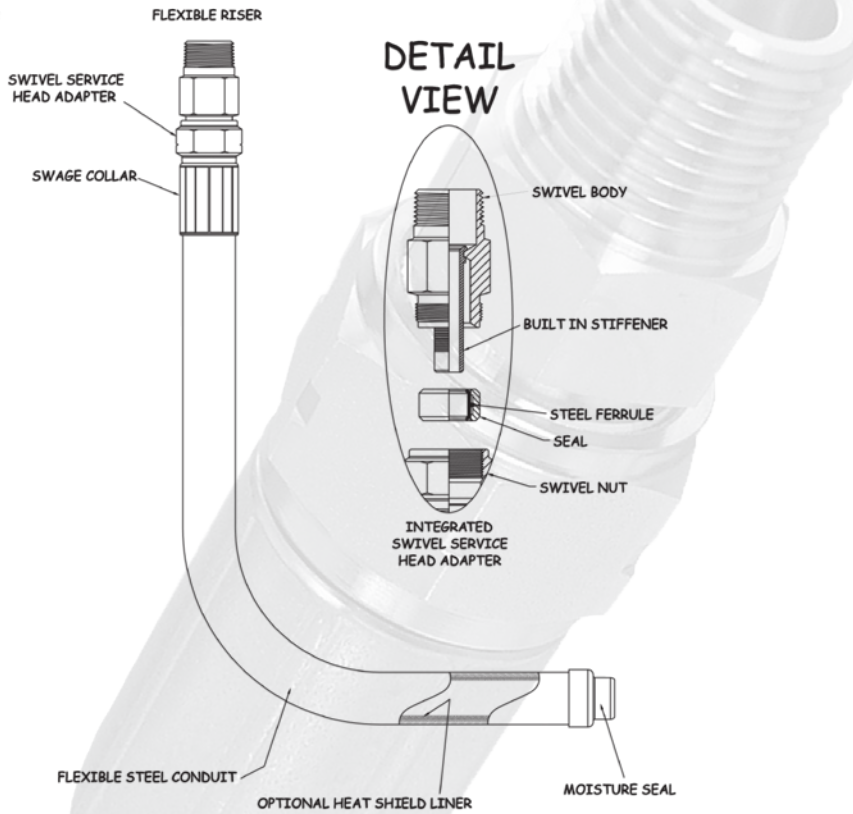

## Features & Benefits

- **NO UNDERGROUND JOINTS** - One solid service line from point-to-point with above ground terminations.
- **NO CHAMFERING** - A simple clean cut is all that is required.
- **BI-DIRECTIONAL SEAL** assembly CAN'T be installed improperly where some competitors multiple internal components MUST have proper order and orientation to function properly.
- **NO TORQUE REQUIREMENTS** - All X-Risers incorporate the "bottoming" or "positive stop" design. Simply tighten the compression nut until it is metal-to-metal and you are done.
- **SIMPLE DESIGN** can be installed with one flat jaw wrench extending the life of protective coatings commonly flawed or removed by pipe wrenches.
- **INTEGRAL BARBED STIFFENERS** are permanent (not loose) for additional pull out resistance.
- **QUALITY** - Chicago Fittings products are CNC machined from solid bar stock (not castings) providing high quality product with the most precise threads and design flexibility.

### Flexible Anodeless Risers for Natural Gas Applications

Part #	Outlet	Tube Size	Wall	SDR	Conduit Length (in.)
XR-10B-8-36-ZDC	1/2" MPT	1/2" CTS	.090"	7	36"
XR-10B-12-36-ZDC	3/4" MPT	1/2" CTS	.090"	7	36"
XR-13B-8-36-ZDC	1/2" MPT	1/2" IPS	.090"	7	36"
XR-18B-12-36-ZDC	3/4" MPT	1" CTS	.090"	12.5	36"
XR-18B-16-36-ZDC	1" MPT	1" CTS	.090"	12.5	36"
XR-18E-12-36-ZDC	3/4" MPT	1" CTS	.100"	11.3	36"
XR-18E-16-36-ZDC	1" MPT	1" CTS	.100"	11.3	36"
XR-17C-12-36-ZDC	3/4" MPT	3/4" IPS	.095"	11	36
XR-21J-16-36-ZDC	1" MPT	1" IPS	.119"	11	36
XR-27G-20-36-ZDC	1 1/4" MPT	1 1/4" IPS	.151"	11	36
XR-27H-20-36-ZDC	1 1/4" MPT	1 1/4" IPS	.166"	10	36
XR-31K-24-36-ZDC	1 1/2" MPT	1 1/2" IPS	.173"	11	36
XR-38M-32-36-ZDC	2" MPT	2" IPS	.216"	11	36