

TECHNI-SPRING – STEEL BASE:



Part # TSB (Techni-Spring Steel Base)

Part # TSS6 (6' Spring Assembly) **OR** Part # TSS8 (8' Spring Assembly)


See page 117 for paver jig info.

Compatible with Epoxy Mounting Kit Part # EPX-5

NOTE: MUST ORDER 3 PARTS FOR A COMPLETE TECHNI-SPRING BASE AND BOARD COMBINATION.


FEATURES:

- Active Base - Spring Feature is Derived from Both Base & Board
- Powder Coated Steel Base with Leaf Spring
- Weight Limit = 250 lbs.
- Available in 6' or 8' Set-Ups
NOTE: MUST BE USED WITH SOLID CORE BOARDS ONLY.
- 2 Hole Drill Pattern 12" on center
- Refer to Board Chart on Pg. 7
- Refer to Available Base Colors on Pg. 7

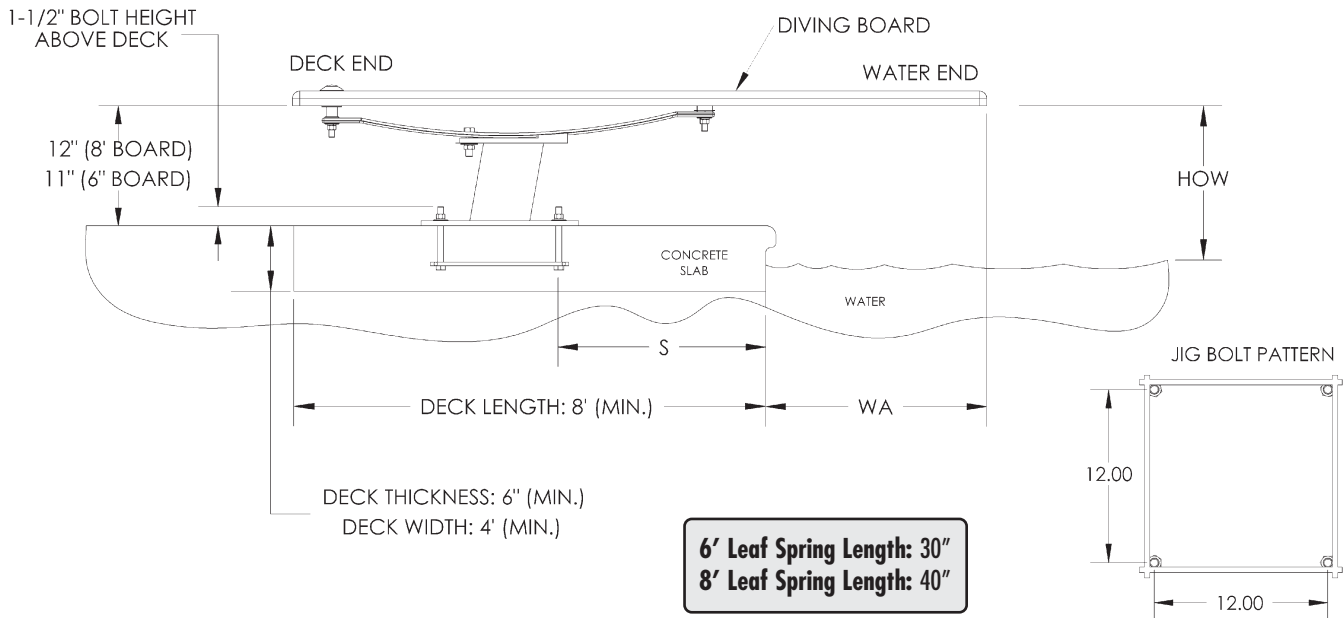

IMPORTANT: THESE DIMENSIONS ARE ACCURATE ONLY FOR VERTICAL POOL WALLS, TYPICALLY GUNITE CONSTRUCTION , WITH LESS THAN A 3' RADIUS TO THE POOL FLOOR. DUE TO THE VARYING SIZES OF OTHER POOLS, TYPICALLY VINYL LINER CONSTRUCTION , PLEASE CONTACT CUSTOMER SERVICE FOR PROPER JIG PLACEMENT. 1-800-737-5386	TECHNI-SPRING PART # (STEEL)	NOMINAL BOARD LENGTH	ANSI/POOL TYPE	DISTANCE FROM WATER'S EDGE TO FORWARD JIG BOLT (S)	DISTANCE FROM END OF BOARD TO FORWARD JIG BOLT	MIN. OVERHANG PLUS OR MINUS 3" (WA)	MAX HEIGHT OF BOARD ABOVE WATER (HOW)
	TSB/TSS6	6'	I	31.5"	49.5"	18"	20"
TSB/TSS6	6'	II	31.5"	49.5"	18"	20"	
TSB/TSS6	6'	III	25.5"	49.5"	24"	26"	
TSB/TSS6	6'	IV	19.5"	49.5"	30"	30"	
TSB/TSS6	6'	V	13.5"	49.5"	36"	40"	
TSB/TSS8	8'	I	NOT ALLOWED				
TSB/TSS8	8'	II	NOT ALLOWED				
TSB/TSS8	8'	III	44.25"	68.25"	24"	26"	
TSB/TSS8	8'	IV	38.25"	68.25"	30"	30"	
TSB/TSS8	8'	V	32.25"	68.25"	36"	40"	

TECHNI-SPRING - STEEL BASE (TSB & TSS6):

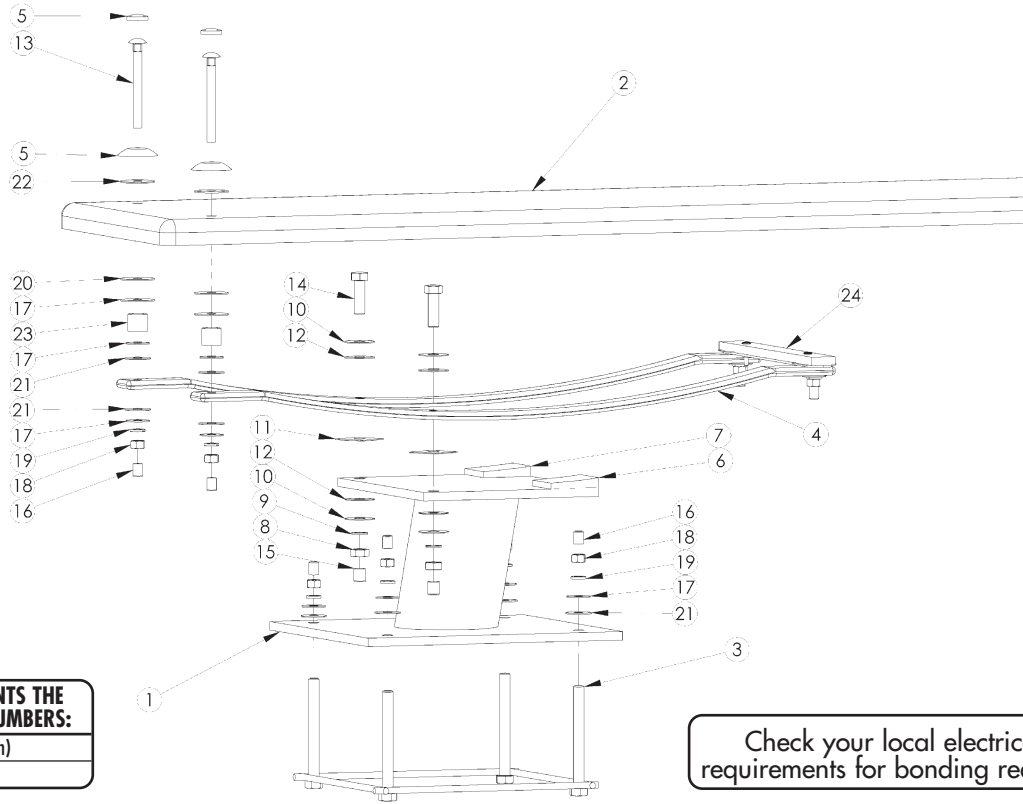

DRAWING REPRESENTS THE FOLLOWING PART NUMBERS:
 TSB & TSS6 (shown)
 TSB & TSS8

Check your local electrical code requirements for bonding requirements.

ITEM #	COMPONENT	DESCRIPTION	KITS – QTY. COUNTS				
			TECHNI-SPRING STEEL	DB-TB-M	TS-BK	TS-M	TSS6
1	TS-B	Techni-Spring Steel Base	1				
2	TB6WW	6' Techni-Beam White w/White Top Tread & Hdw Kit	1				
3	TS-EDGE-J	Techni-Spring Leaf Spring & Mounting Hardware	1				
4	TSS6	Techni-Spring Assembly & Mounting Hardware					1
5	H-WHT WAS/CAP	I.F. White Washer Cap		2			
6	H-RIGHT PLUG	Right Base Nylon Plug	1				
7	H-LEFT PLUG	Left Base Nylon Plug	1				
8	H-SS 5/8 H NUT	5/8-11 Hex Finish Nut S.S.				2	
9	H-SS 5/8 LOC WA	5/8 Split Lock Washer S.S.				2	
10	H-SS 5/8 F WASH	5/8" USS Flat Washer S.S.				4	
11	H-5/8 SQ WASH	5/8 x 2" Square Nylon Washer				2	
12	H-5/8 RD WASH	5/8 x 1-3/4" Round Nylon Washer				4	
13	H-SS 5 C BOLT	1/2-13 x5 Carriage Bolt S.S.		2			
14	H-SS 5/8 HEX HD	5/8-11 x 2 Hex C/S GR5 S.S.				2	
15	H-1x1-1/2 W CAP	1" I.D. x 1-1/2" Long White UV				2	
16	H-1-1/2 WHT CAP	.750 x 1-1/2 White UV Nut Cap	2	4			
17	H-SS 1/2 F WASH	1/2 USS Flat Washer S.S.	2	4	4		
18	H-SS 1/2 H NUT	1/2"- 13 Hex Finish Nut S.S.	2	4			
19	H-SS 1/2 LOC WA	1/2 Lock Washer S.S.	2	4			
20	H-1/2 RED WASH	1/2 x 2" Red Rubber Washer	2				
21	H-1/2 NYLON WAS	1/2" Flat Washer Nylon		4	4		
22	H-1/2 BLK WASH	1/2 x 2" Black Rubber Washer	2				
23	H-SS 1 SPACER	1" Spacer S.S.				2	
24	TS-FC	Techni-Spring Rubber Fulcrum Pad	1				
25*	H-ANTI-SEIZE	Packet of Anti Seize Lubricant (not shown)		1			

DB-TB-M:
Board to Base Mounting Hardware

TS-BK:
Base to Jig Mounting Hardware

TS-M:
Spring to Base Mounting Hardware

* not pictured

NOTES:

TB6WW diving board shown in exploded view for illustration purposes. Must be purchased separately. Other diving board options available.