





## Flush mount your heater in four simple steps


**STEP 1** | Frame the pocket that will house the heater with a one hour-rated fire containment box.

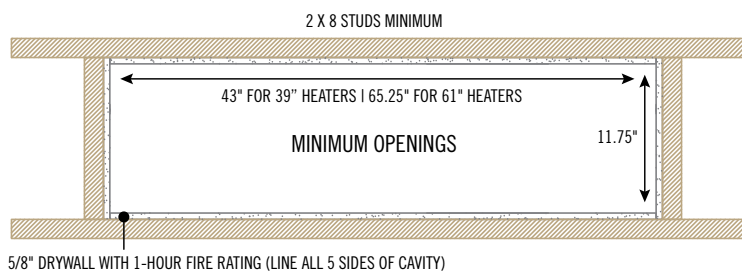


**STEP 2** | Mount the junction box outside of the pocket. You can choose to mount the junction box in a variety of locations, depending upon where you'll be accessing it.

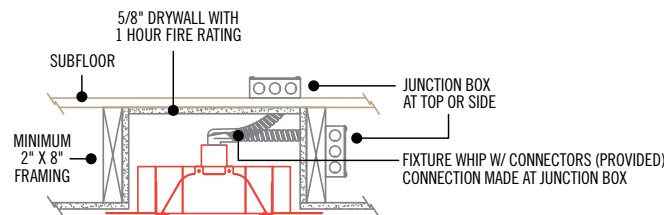

**STEP 3** | Install the frame into the finished pocket. You may choose to leave all four inches of the trim exposed, or partially cover it (ventilation holes exposed) with a decorative ceiling.

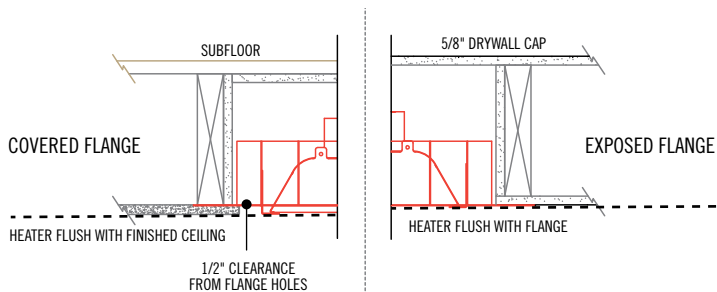

**STEP 4** | Install the heater and adjust the tabs to set the heater height appropriately.

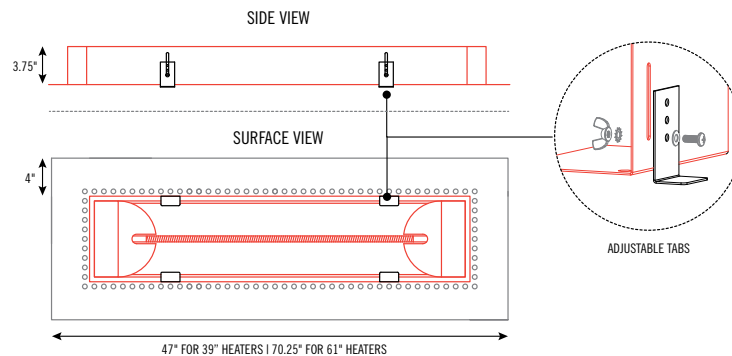

FOR VIDEO INSTRUCTIONS,  
VISIT [INFRATECH-USA.COM/FLUSH-MOUNT](http://INFRATECH-USA.COM/FLUSH-MOUNT) OR SCAN

