

model IL6.xxx.500



Construction


- > Dimensions 6" width x .5" height x 3" depth
- > Heavy duty field-replaceable faceplate
- > Self leveling insert is stainless steel 18g alloy 304
- > 6-32 slotted copper, brass or stainless steel screws
- > Lifetime Limited Warranty
- > C/US UL Listed 1838 Low Voltage Landscape Lighting



Electrical

- > Low voltage 12vAC operation
- > Overmolded LED circuitry with renewable materials
- > IP68 certified waterproof
- > 2 watt energy consumption
- > Output similar to 10 watts
- > Lumen output 120
- > 72" long 18/2 leads for connection
- > Magnetic or electronic transformer compatible
- > LED life expectancy up to 40,000 hours

Dimensions

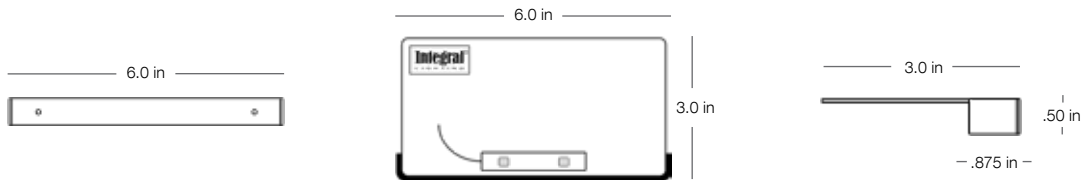

dimensions are approximate

LED Color Outputs



2700K warm white
add suffix .200 to model number



3000K pure white
order as listed below



4200K cool white
add suffix .400 to model number

Fixture Finishes



MADE IN THE USA