

IntelliPro3[™] VARIABLE SPEED AND FLOW POOL PUMP

SPECIFICATION SHEET

MATERIAL AND DESIGN

PUMP BODY AND PARTS

- Material
 - Glass reinforced thermoplastic
 - Threaded brass inserts throughout
 - Bronze impeller wear ring
 - Compression resistant EPDM rubber
 - Stainless steel hardware
- Port size
 - Suction: 2.5" with unions (2" with included adapter or 3" with optional kit)
 - Discharge: 2.5" with unions (2" with included adapter or 3" with optional kit)
- Mechanical seal
 - Type 6 mechanical seal
 - Made of ceramic, stainless steel, and EPDM

HAIR AND LINT STRAINER

- Material
 - White high density polyethylene thermoplastic
 - Clear thermoplastic
 - Glass reinforced thermoplastic

MOTOR

- NEMA rated 56 frame square flange totally enclosed fan cooled (TEFC)
- Permanent magnet synchronous motor (PMSM)
- Shaft
 - 300 series stainless steel
- Thermal overload protection
 - Provided by the motor control circuit
- Bearings
 - Lubricated, double sealed, stainless steel, single row, ball bearings
- Intrusion protection
 - IPx5

PENTAIR.COM

IntelliPro3TM VARIABLE SPEED AND FLOW POOL PUMP

SPECIFICATION SHEET


ELECTRICAL SPECIFICATIONS

3.0HP IntelliPro3 VSF		
Input Voltage Nominal		208-230VAC
Input Current		12.4/11.2 Amps
Input Frequency		Single Phase, L1-L2 or L-N, 50 or 60Hz
Maximum Input Watts		2590W
Maximum Shaft Horsepower		3.0HP
Speed Range		1-100% (450-3450 RPM)
Environmental Enclosure Rating		NEMA Type 3/ IPX5
Ambient Condition Range	Storage	-40°C to +60°C (-40°F-140°F)
	Operating	0 to 50°C (32-122°F)
	Humidity	Relative 0-95% Non-Condensing


PERFORMANCE & EFFICIENCY CURVES







*Savings based on variable speed pump compared to a single-speed pump running 12 hours per day at an average of \$0.16 per kWh in a 20,000 gallon pool. Actual savings may vary based on local utility rates, pool size, pump run time, pump horsepower, pump rpm, plumbing size and length, pump model, service factor and other hydraulic factors. Individual Weighted Energy Factor (WEF) scores and savings may vary by model.



3HP Models: WEF: 7.1 and THP: 3.0



SOUND LEVELS


Sound Levels 85 ľ 80 3' 75 70 65 Sound Pressure Level (dBA) 60 20' 55 30' 50' 50 75' 45 100 40 35 30 25 20 100 20 30 40 50 60 70 80 90 Pump % Speed Distance from Pump *Sound pressure levels calculated from A-weighted sound power level obtained from independent testing -1 ft —3 ft —— 10 ft — **3**0 ft


IntelliPro3TM VARIABLE SPEED AND FLOW POOL PUMP

SPECIFICATION SHEET



PRODUCT DIMENSIONS




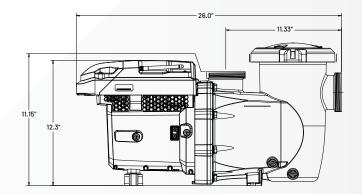



Scan the QR code for installation instructions and set-up using the Pentair Pro app.

pentair.com/intelliflo3-proapp-support







ecoselect[®] The Sta-Rite IntelliPro3 pump has earned the Eco Select[®] brand distinction as one of the greenest and most efficient choices from Pentair

TRADEGRADE The TradeGrade family of products is exclusively made for and sold by the world's most demanding pool professionals.

400 Regency Forest Dr | Cary, NC 27518 | United States | 800.831.7133 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2022 Pentair. All rights reserved. Pentair.com