



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 4260-LED Landscape Series • Step & Brick Lights

FIXTURE SPECIFICATIONS:

CHASSIS:

Stainless Steel

FLANGE PLATE:

Stainless Steel

HOUSING:

Aluminum, Stainless Steel, Brass, or Copper

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White. Also, natural copper, stainless steel, natural brass, and Olde brass.

LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

ELECTRICAL:

Input voltage range 6 - 15V AC or 12V DC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

LENS:





High-impact, textured, Tuffak® lens for superior light distribution.

WIRING:

Provided with a five-foot pigtail of 18-2 SPT1 UV resistant cable & underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

DIMENSIONS:

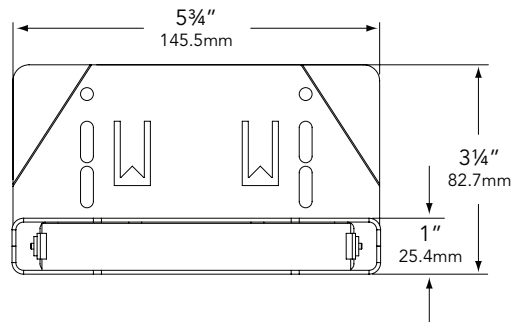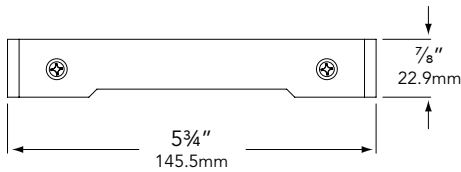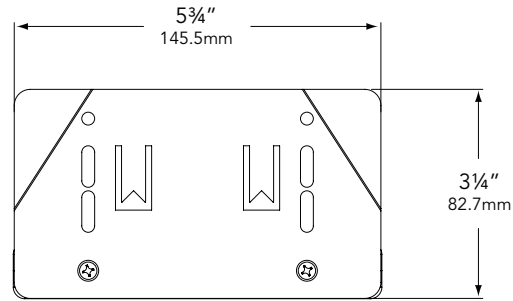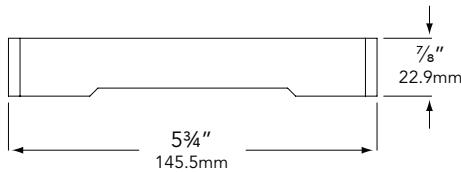

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 4260-LED Landscape Series • Step & Brick Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: SL-4260-B-W-LB2ND

MOUNTING	MODEL	FINISH	COLOR TEMPERATURE	LAMP
SL- Step light	4260	B - Black BR - Architectural Brick Z - Architectural Bronze LZ - Light Bronze DZ - Dark Bronze GT - Granite TC - Terracotta R - Rust HG - Hunter Green WB - Weathered Bronze WI - Weathered Iron W - White G - Verde P - Pewter M - Mocha SS - Stainless Steel CSN - Copper BSN - Brass BSO - Olde Brass	W - Warm C - Cool	LB2ND - 2.5 watt LED - Group B Emitter Qty - 1 Temperature - Warm (W), Neutral (N), Cool (C) Operating voltage range - 6 to 15V. (Please see lamp order code column on lamp guide, Vista product catalog.)

Fixtures shipped with standard lamp, unless otherwise specified.