CHAMELEON PAR36

DESCRIPTION


Bring color to your lighting design with Brilliance Chameleon PAR36 lamps! Control dimming from 2200K to 5700K and a wide range of reds, greens, and blues from your smart device. Suitable for damp locations and for use in totally enclosed luminaires. Not for underwater use.

FEATURES

- Wi-Fi enabled
- RGBW 2200K to 5700K and a wide range of reds, greens, and blues
- · Control landscape lighting from your smart phone
- Use Brilliance Smart app to change lamp settings
- Turn on and off
- Set and change colors
- Set and control dimming
- Set and control schedules
- Set astronomical timers for sunrise/sunset
- Program custom scenes to run with one tap
- Control devices independently or as a group
- · Android and iOS compatible

CHAMELEON PAR36 SPECS

Wattage	9
Lumens	442-686
Kelvin Temperature	2200-5700
Beam Spread	15 [°] , 30 [°] , 60 [°]
Color	RGBW
Input Voltage	8-25 VAC/DC/60Hz
Replaces	35W Halogen
CRI	80
IP	67
Lamp Life (hours)	50,000
Warranty (years)	5

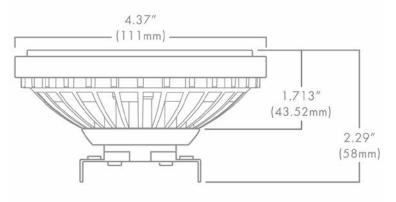

Part Number: BRI-PAR36-CHM-9-RC	SBW-XX
	Beam spread



TECHNICAL REQUIREMENTS: Must have consistent 2.4 GHz Wi-Fi signal at the installation location with dBm strength of -70 or better. See the Brilliance Smart Products Guide for more information and troubleshooting.







Brilliance Smart app

Chameleon Set Up